



VSNDT

ENDOSCOPE SOLUTION PROVIDER

Audio and video endoscope VS-M





HD Telescopic Endoscope

- 7 inch HD large screen
- 360° full swing head
- 5 Million camera pixels
- 6 hours extra long endurance
- 8 LED lights 7-gear adjustable
- Two-way voice intercom

7 inch HD large screen



- ⊖ Back
- ⊕ Onward
- ⊗ Function
- ⊖ Return
- ⊕ Photo Video
- ⊗ ON/OFF Light ON/OFF





Screen rotate, zooms 4 times



- DC12V
- USB input
- Audio/video output
- TF card slot
- Video/Photo/Playback
- Camera input


Voice intercom two-way communication



5 m telescopic rod, replaceable carbon fiber

Keep abreast of the site environment

360° full swing head

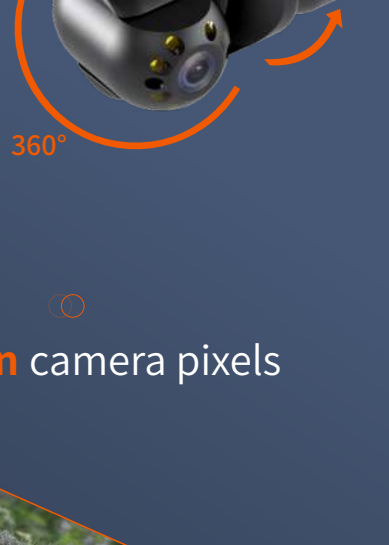


5 Million camera pixels



HD Telescopic Endoscope Clear picture more accurate display of the scene

6 hours extra long endurance

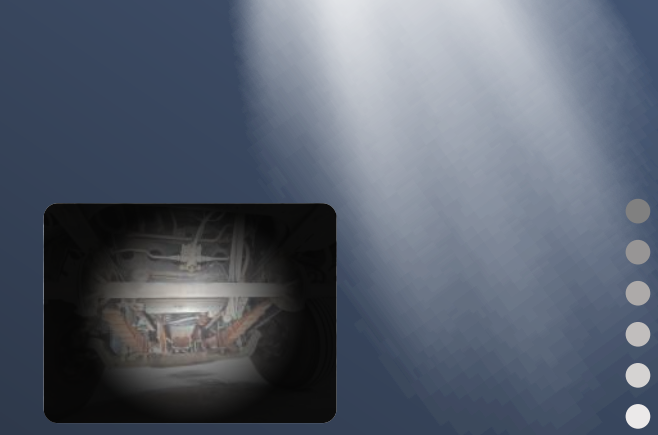


Long-lasting work worry-free and labor-saving


8 LED lights 7 levels of brightness adjustable

7 levels of brightness adjustable

SCOPE OF APPLICATION




Vehicle inspection




High-altitude inspection




Public security armed police



Dangerous Search and Rescue

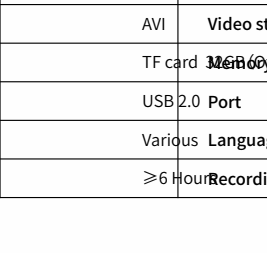

Security check



SWAT anti-terrorism

Product parameters

Probe head	
HD chip	Camera device
5 million pixels	5 million pixels
8 LED lights (7 levels of brightness adjustable)	8 LED lights (7 levels of brightness adjustable)
3.6mm F1.2 (1.2m)	3.6mm F1.2 (1.2m)
360° horizontal rotation, 260° vertical rotation	360° horizontal rotation, 260° vertical rotation
20-100cm	Focal length
34.5 x 51.5mm	Size
2-5m	Lighting
Tod retracts: 1.5m	Retracting length: about 5.15m
7 inch HD display	
1024X600	Screen resolution
1080P	Video resolution
3200X1800	Picture resolution
7500mAh	Battery capacity
AVI	Video storage
TF card (Max 64GB)	Storage (Customization)
USB 2.0 Port	USB 2.0 Port
Various	Language
≥6 Hour	Recording time